

BoscoLighting's GIT Recessed Downlight is a high powered LED downlight designed to light up your retail displays, events and large reception areas creating the impact your clients really desire.

While really bright, they are also very energy efficient. Our lights come with a L90 B10 rating, which means they are designed to stay brighter for longer, so your shop, reception area or foyer will retain its impact for many years.

Features

- Range from 8W to 50W
- Easy installation
- LED Driver Included
- Supplied with Flex & Plug

Applications

- Museums & galleries
- Retail shops
- Bars & restaurants
- Residential and commercial projects


Downlight GIT



Specs

Connect: AU Standard Flex & Plug
Dimming: Various dimming options available on request

15°	24°	38°	60°
IP 44	>80 CRI	92 CRI	AC 200-240V
		3 Yrs Warranty	35000 @ L90 B10 Lifetime

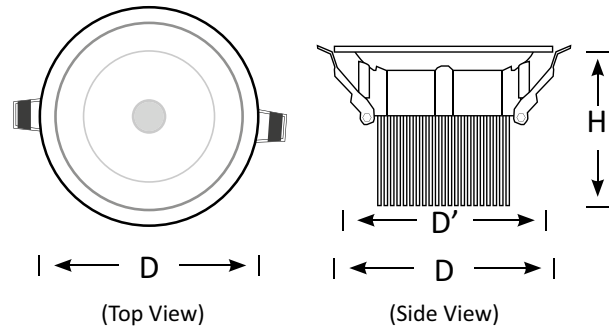

BLDL-GIT-08

8W Recessed Downlight
Luminous Flux (lm): 800
CCT: Whites(3000K-5000K)
Viewing Angle: 24°
Dimensions (mm): D95*H80
Cutout(mm):D'75
Weight(kg): 0.4



BLDL-GIT-12

12W Recessed Downlight
Luminous Flux (lm): 1200
CCT: Whites(3000K-5000K)
Viewing Angle: 24°/38°/60°
Dimensions (mm): D115*H116
Cutout(mm): D'95
Weight(kg): 0.6



BLDL-GIT-20

20W Recessed Downlight
Luminous Flux (lm): 2000
CCT: Whites(3000K-5000K)
Viewing Angle: 24°/38°/60°
Dimensions (mm): D142*H131
Cutout(mm): D'125
Weight(kg): 0.8



BLDL-GIT-30

30W Recessed Downlight
Luminous Flux (lm): 2700
CCT: Whites(3000K-5000K)
Viewing Angle: 24°/38°/60°
Dimensions (mm): D160*H133
Cutout(mm): D'140
Weight(kg): 1.2



BLDL-GIT-40

40W Recessed Downlight
Luminous Flux (lm): 3600
CCT: Whites(3000K-5000K)
Viewing Angle: 24°/38°/60°
Dimensions (mm): D185*H136
Cutout(mm): D'160
Weight(kg): 1.4



BLDL-GIT-50

50W Recessed Downlight
Luminous Flux (lm): 4500
CCT: Whites(3000K-5000K)
Viewing Angle: 24°/60°
Dimensions (mm): D230*H145
Cutout(mm): D'200
Weight(kg): 1.6